

**PRODUCT
CATALOG**





ABOUT US

Expanding its volume in the sector with the investment decision taken in 2005, UMS established **the first and only Steel Service Center** in its region and provided fast, quality and solution-oriented services for the special size galvanized sheet requests demanded with its length cutting line, trapezoidal line and slitting line.

Starting its export adventure in 2010, it has managed to export to **more than 17 countries**, consisting of Europe, North Africa and Turkic Republics, especially Norway, Sweden, Denmark, France.

In 2018, the company took new steps in terms of quality and received **TS EN ISO 9001** Quality Management System Certificate, **TS EN ISO 14001** Environmental Management System Certificate, **TS OHSAS 18001** Occupational Health and Safety Management System Certificate, **ISO 14025** and **TS EN 15804** Environmental Product Declaration (EPD) for Steel Profile and Accessories.

UMS Uğur Metal Sanayi took its first step in the sector in **1999** by trading galvanized and painted galvanized sheet metal in Ankara Ostim OIZ. In a very short time, he managed to stand out in his own sector with his principled attitude and high-quality understanding.

UMS, which crowned the importance it attaches to quality by obtaining **TS EN ISO 9001** Quality Management Certificate in 2006, has become a Steel Service Center that makes a difference with its quality certificate.

Continuing its growth and development in the sector with its investments, **the company has become the fastest producer brand in Turkey** with the largest profile production capacity and producing gypsum and gypsum board profiles, exterior profiles and connection accessories with new production lines added to its body in 2013.



2020

In 2020, **UMS Reform Suspended Ceiling Profiles** with a completely new design and surface texture with new profile lines with emboss technology were developed and added to the product portfolio.

2019


In 2019, together with **Atılım University Material Forming and Excellence Center, UMS Power Ceiling Profiles**, which show an upper thickness performance in suspended ceiling systems compared to their counterparts, have been developed and started to be produced. The developed design has been registered by obtaining the Utility Model Certificate.

2022

In the ASO 2 region in Temelli, 38 production centers, 8000 m2 closed and 4000 m2 open, with a total area of 12000 m2, Turkey's largest and highest production capacity profile factory has been opened.

Today, UMS, which continues its production activities /with all its speed and stability, continues to carry out its production activities with its annual **120 thousand tons of SSS production capacity, 150 million meters of profile production capacity** and modern machines, galvanized cold forming steels and galvanized non-alloy structural steels.

Since the first day he stepped into the sector, by adopting customer satisfaction, after-sales service, quality and reliability as principles, he continues to make a difference in the sector with the philosophy of always being **"one step ahead"** in innovation, technology and development, reaching the European markets he targets and taking firm steps forward.

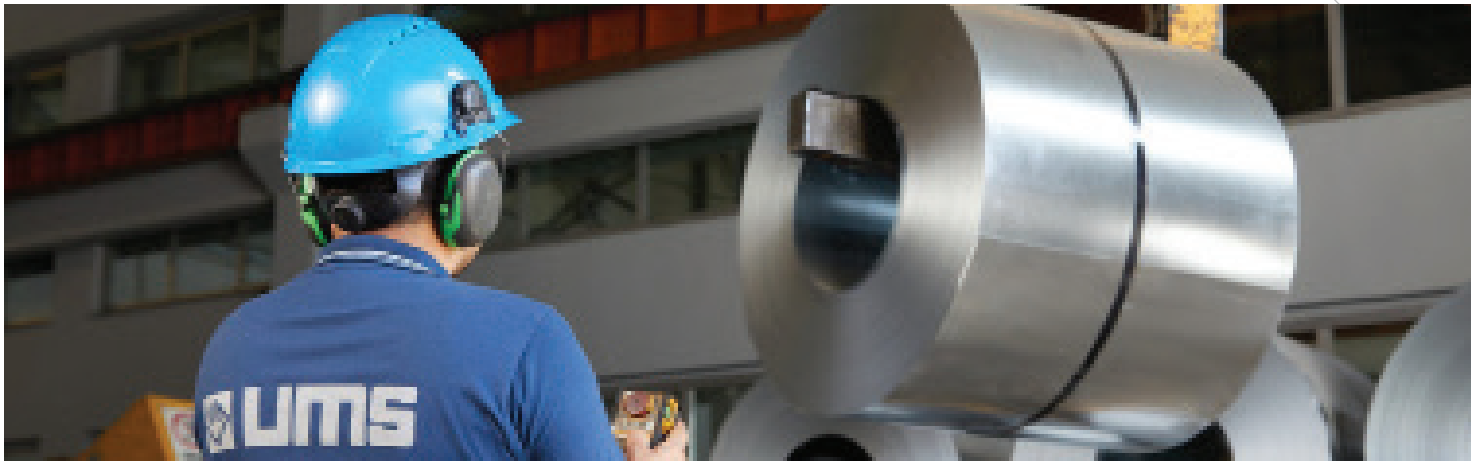



UMS QUALITY POLICY

It is our fundamental principle to adopt quality as a way of life in order to provide the highest quality products and services with a view to maintain our respect and existence towards our customers.

We believe that the factors that reinforce the quality are a participatory working environment, qualified and trained personnel, healthy working conditions, environmental awareness, and ability to adapt to time and changing conditions.

***For these reasons,
it is our company
policy to:***

Increase quality and environmental awareness, maintain a safe working environment and implement innovations and modern technology by continuously training all our employees,

Provide our customers with high quality products, in the shortest time, by guaranteeing the highest quality, performance, product reliability and value in a consistent manner,

Comply with national and international standards and laws regarding the products,

Implement the quality management system we have established and continuously improve its effectiveness.

quality
policy



EPD



TS EN ISO 9001 - 2015



TS ISO 45001 - 2018



TS EN ISO 14001 - 2015



INDEX

Drywall Track

050T025
052T025
062T025
072T025
094T032
148T050

10
12
14
16
18
20

Drywall Stud

048S032
050S032
060S032
070S032
092S032
146S032

11
13
15
17
19
21

I Stud

050I038
060I038
070I038
092I038
0146I038

22
23
24
25
26

T Profile

050T009

Fixing Channel

099FC095
070FC042
092FC042
146FC042

28
29
30
31

Fixing Strap

070FS240



Ceiling Liner

045CL018
045CL018

Perimeter Liner

019PT018

Perimeter Channel

026F028

Primary Channel

045F015

Long Angle

019L032
025L025
025L050

Ceiling Furring

053F026

Perimeter Channel

028F020

Resilient Bar

045RB016

Zed Profile

030Z020

DRYWALL PROFILES


drywall
track &
stud







DRYWALL TRACK 50

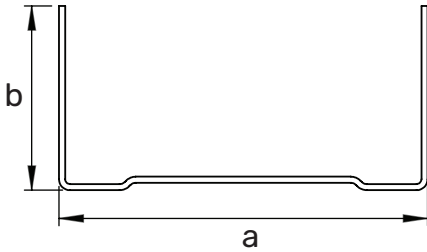

050T025


UMS Drywall Track is a profile type that is used for aligning Drywall Studs on the floor and ceiling in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Track profiles have high level of corrosion resistance and long service life.

They form the lower and upper frame of the wall system in partition wall applications. Drywall Studs are applied by installing them in the channel formed with Drywall Tracks on the ceiling and floor, and the partition wall construction is created.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
050T025-50	0,50	50	25	Z140 or Z275	min. 210	0,370



DRYWALL STUD 48

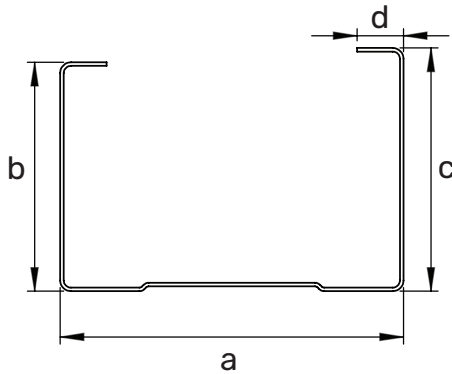

UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.


They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

048S032

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
048S032-50	0,50	48	32	34	6,5	Z140 or Z275	min. 210	0,464



DRYWALL TRACK 52

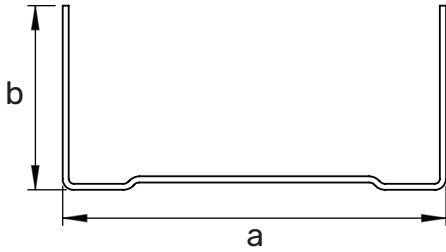

052T025


UMS Drywall Track is a profile type that is used for aligning Drywall Studs on the floor and ceiling in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Track profiles have high level of corrosion resistance and long service life.

They form the lower and upper frame of the wall system in partition wall applications. Drywall Studs are applied by installing them in the channel formed with Drywall Tracks on the ceiling and floor, and the partition wall construction is created.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
052T025-50	0,50	52	25	Z140 or Z275	min. 210	0,377



DRYWALL STUD 50

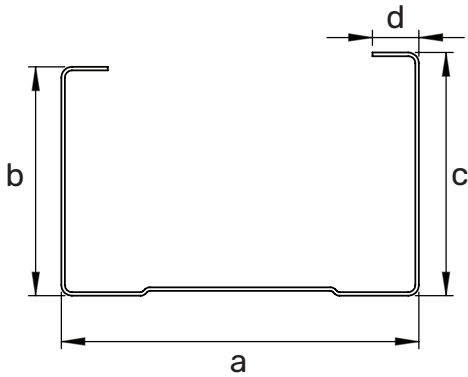

UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.


They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

050S032

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
050S032-50	0,50	50	32	34	6,5	Z140 or Z275	min. 210	0,472



DRYWALL TRACK 62

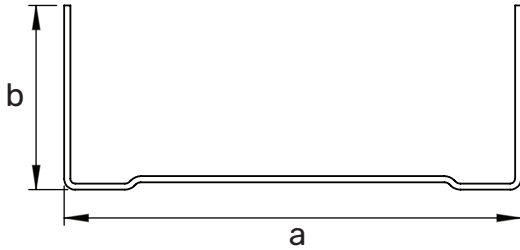

062T025


UMS Drywall Track is a profile type that is used for aligning Drywall Studs on the floor and ceiling in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Track profiles have high level of corrosion resistance and long service life.

They form the lower and upper frame of the wall system in partition wall applications. Drywall Studs are applied by installing them in the channel formed with Drywall Tracks on the ceiling and floor, and the partition wall construction is created.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
062T025-50	0,50	62	25	Z140 or Z275	min. 210	0,370



DRYWALL STUD 60

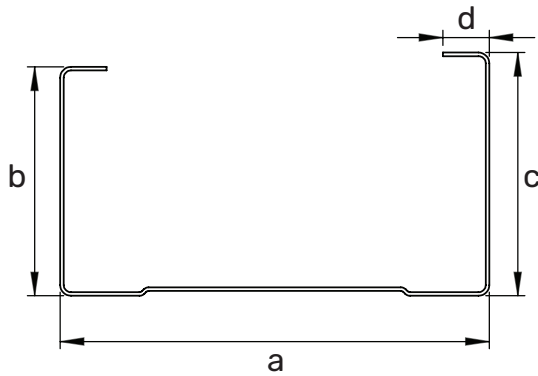

060S032


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
060S032-50	0,50	60	32	34	6,5	Z140 or Z275	min. 210	0,509



DRYWALL TRACK 72

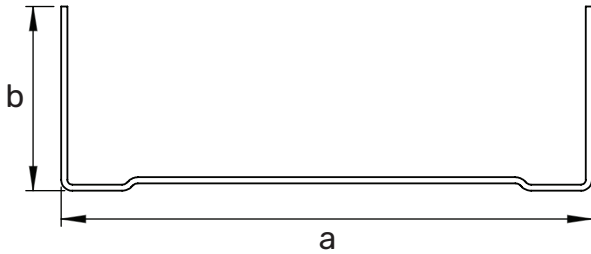

072T025


UMS Drywall Track is a profile type that is used for aligning Drywall Studs on the floor and ceiling in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Track profiles have high level of corrosion resistance and long service life.

They form the lower and upper frame of the wall system in partition wall applications. Drywall Studs are applied by installing them in the channel formed with Drywall Tracks on the ceiling and floor, and the partition wall construction is created.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
072T025-50	0,50	72	25	Z140 or Z275	min. 210	0,452



DRYWALL STUD 70

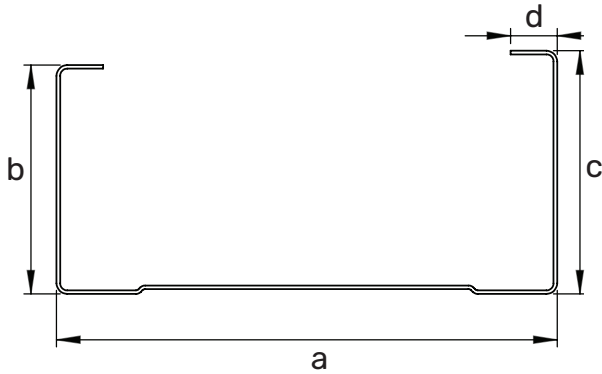

UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.


They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

070S032

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
070S032-50	0,50	70	32	34	6,5	Z140 or Z275	min. 210	0,547



DRYWALL TRACK 94

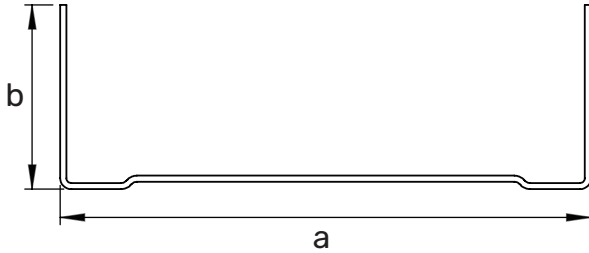

094T032


UMS Drywall Track is a profile type that is used for aligning Drywall Studs on the floor and ceiling in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Track profiles have high level of corrosion resistance and long service life.

They form the lower and upper frame of the wall system in partition wall applications. Drywall Studs are applied by installing them in the channel formed with Drywall Tracks on the ceiling and floor, and the partition wall construction is created.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
094T032-50	0,50	94	32	Z140 or Z275	min. 210	0,588



DRYWALL STUD 92

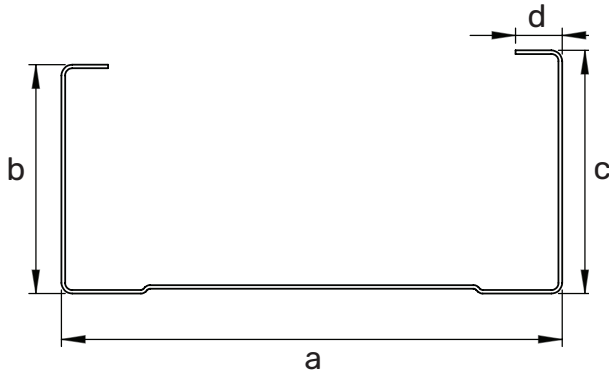

092S032


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
092S032-50	0,50	92	32	34	6,5	Z140 or Z275	min. 210	0,630



DRYWALL TRACK 148

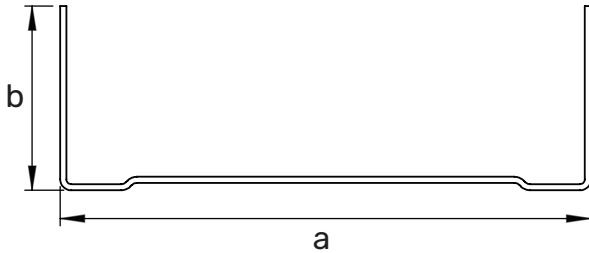

148T050


UMS Drywall Track is a profile type that is used for aligning Drywall Studs on the floor and ceiling in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Track profiles have high level of corrosion resistance and long service life.

They form the lower and upper frame of the wall system in partition wall applications. Drywall Studs are applied by installing them in the channel formed with Drywall Tracks on the ceiling and floor, and the partition wall construction is created.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
148T050-50	0,50	148	50	Z140 or Z275	min. 210	0,927



DRYWALL STUD 146

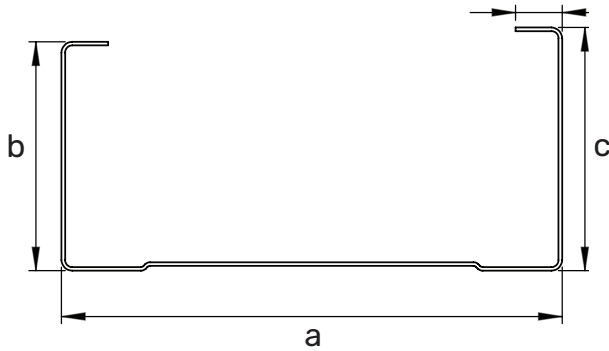

146S032


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
146S032-50	0,50	146	32	34	6,5	Z140 or Z275	min. 210	0,833



ISTUD 50

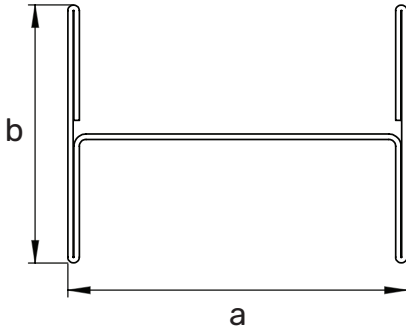

0501038


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
0501038-60	0,60	148	38	Z140 or Z275	min. 210	0,720



ISTUD 60

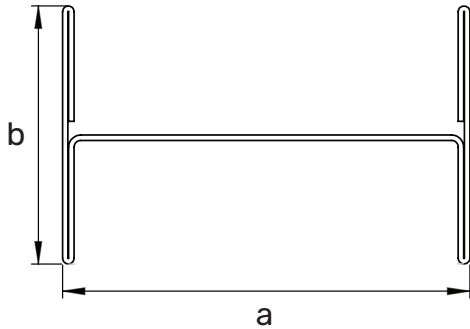

0601038


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
0601038-60	0,60	60	38	Z140 or Z275	min. 210	0,757



I STUD 70

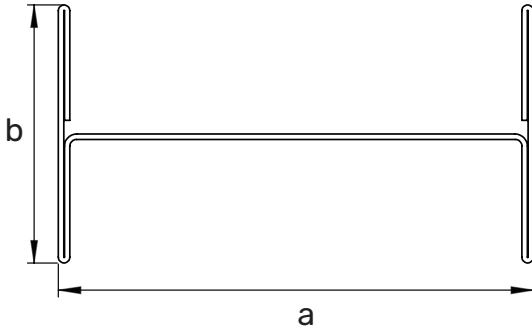

0701038


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
0701038-70	0,70	70	38	Z140 or Z275	min. 210	0,795



ISTUD 92

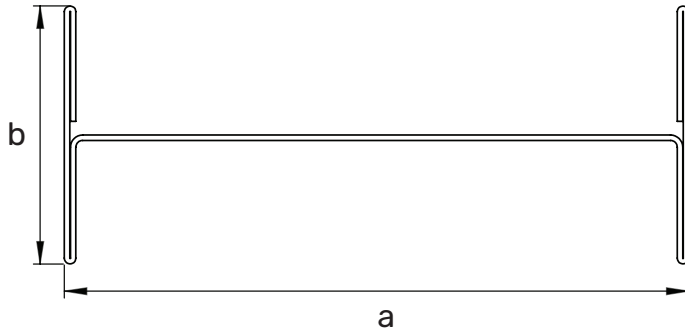

0921038


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
0921038-90	0,90	92	38	Z140 or Z275	min. 210	0,878



I STUD 146

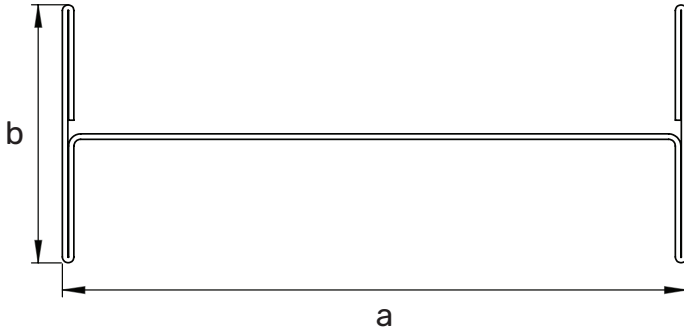

1461038


UMS Drywall Stud is a profile type that is applied vertically to provide support in partition wall systems. Manufactured from hot deeped galvanized coil, the Drywall Stud profiles have high level of corrosion resistance and long service life.

They are used in partition wall applications by installing vertically between the Drywall Trucks on the floor and ceiling. They carry the partition wall system and create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
1461038-90	0,90	146	38	Z140 or Z275	min. 210	1,081



T PROFILE

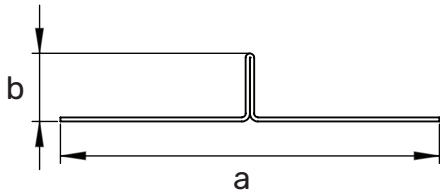


050T009

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
050T009-50	0,50	50	9	Z140 or Z275	min. 210	0,245



FIXING CHANNEL 50


fc 50

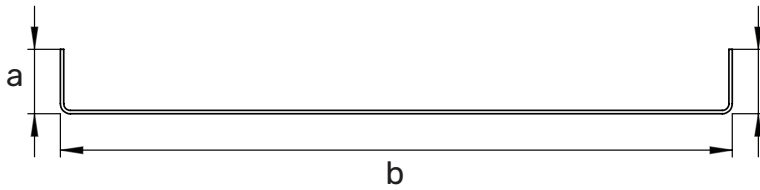


Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
099FC095-50	0,50	99	9,5	Z140 or Z275	min. 210	0,441



FIXING CHANNEL 70

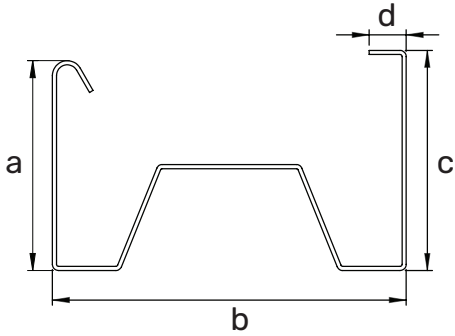


xr 70

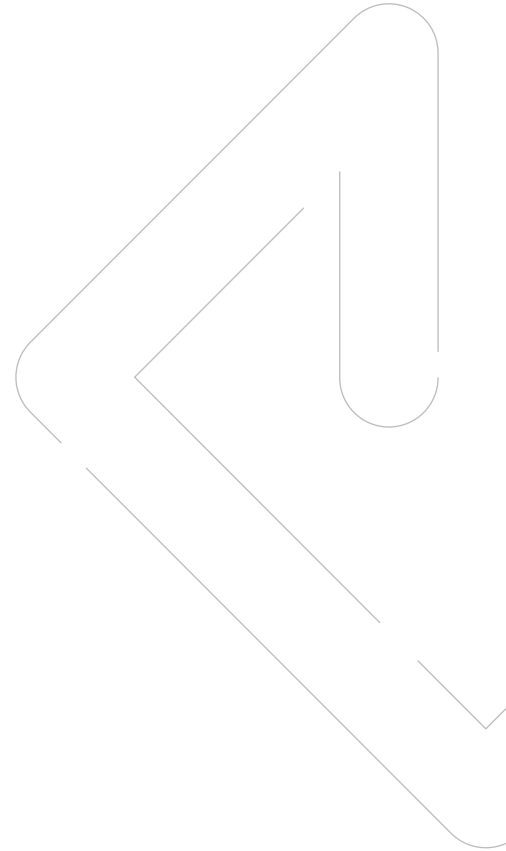

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
070FC042-50	0,50	70	42	44	6	Z140 or Z275	min. 210	0,720



FIXING CHANNEL 92

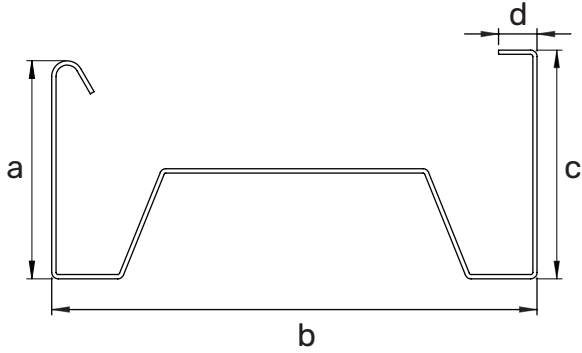


xr 92

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
092FC042-50	0,50	92	42	44	6	Z140 or Z275	min. 210	0,806




FIXING CHANNEL 146

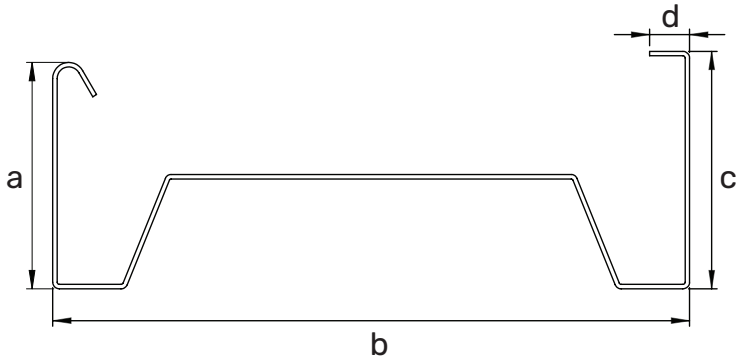

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
146S042-50	0,50	146	42	44	6	Z140 or Z275	min. 210	1,006



FIXING STRAP 70

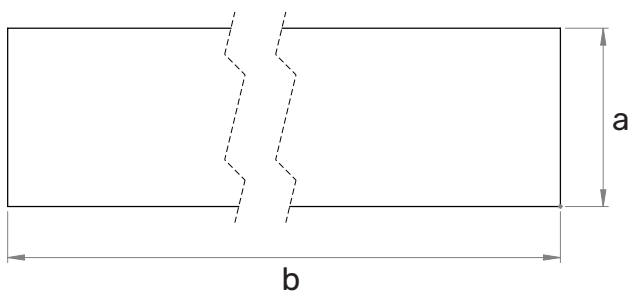

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
070FS240-50	0,50	70	2400	Z140 or Z275	min. 210	0,264





SUSPENDED CEILING PROFILES


mf5
mf6
mf7
L angle







CEILING LINER

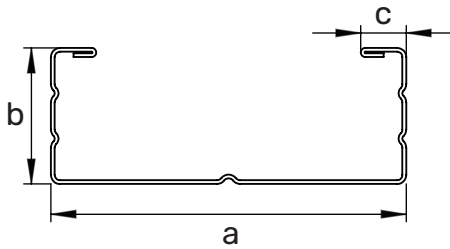


045CL018
047CL018

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
045CL018-50	0,50	45	18	9	Z140 or Z275	min. 210	0,359
047CL018-50	0,50	47	18	9	Z140 or Z275	min. 210	0,366



PERIMETER TRACK




019PT018

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
019PT018-50	0,50	19	18	28	Z140 or Z275	min. 210	0,238



CEILING FURRING

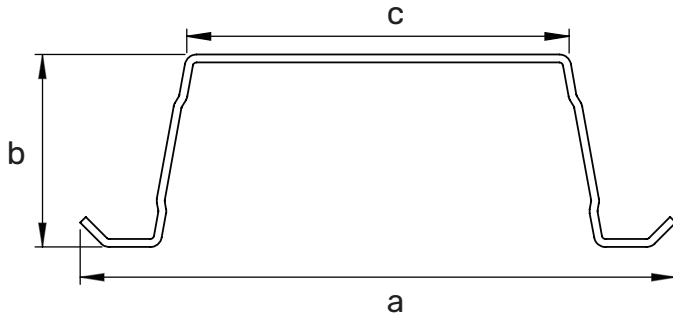

053f026

UMS Furring Channel is a multifunctional profile type used for walls and ceilings. Manufactured from hot deeped galvanized coil, the Furring Channel profiles have high level of corrosion resistance and long service life.


They are installed vertically on the wall surface using concrete nails or power-driven fasteners in concrete wall applications. They create a suitable surface for the installation of plasterboards.

In suspended ceiling applications, they are connected to U channel profiles with Metal Furring Clips and installed on the ceiling using suspension wires. UMS Furring Channel profiles can also be used by installing directly on the ceiling using screws or power-driven fasteners. They create a suitable surface for the installation of plasterboards.

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
053F026-50	0,50	81	26	53	Z140 or Z275	min. 210	0,456



PERIMETER CHANNEL



026f028


UMS U Channel is a supporting profile that is used for installation of Furring Channels on the ceiling. Manufactured from hot deeped galvanized coil, the U Channel profiles have high level of corrosion resistance and long service life.

In suspended ceiling applications, they are connected to Furring channel profiles with Metal Furring Clips and installed on the ceiling using suspension wires.

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
026F028-50	0,50	26	19	28	Z140 or Z275	min. 210	0,268



PERIMETER CHANNEL



028f030

UMS U Channel is a supporting profile that is used for installation of Furring Channels on the ceiling. Manufactured from hot deeped galvanized coil, the U Channel profiles have high level of corrosion resistance and long service life.

In suspended ceiling applications, they are connected to Furring channel profiles with Metal Furring Clips and installed on the ceiling using suspension wires.

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
028F020-50	0,50	28	20	30	Z140 or Z275	min. 210	0,286



PRIMARY CHANNEL



UMS U Channel is a supporting profile that is used for installation of Furring Channels on the ceiling. Manufactured from hot deeped galvanized coil, the U Channel profiles have high level of corrosion resistance and long service life.


In suspended ceiling applications, they are connected to Furring channel profiles with Metal Furring Clips and installed on the ceiling using suspension wires.

045f070

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
045F015-70	0,70	45	15	15	Z140 or Z275	min. 210	0,386
045F015-90	0,90	45	15	15	Z140 or Z275	min. 210	0,494



RESILIENT BAR

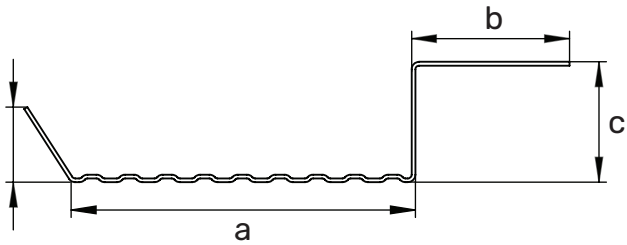


045rb016

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
045RB016-50	0,50	45	21	16	Z140 or Z275	min. 210	0,347



LONG ANGLE




UMS Long Angle is a profile type used to create a frame in metal construction that is installed with Furring Channel. Manufactured hot deeped galvanized coil, the Long Angle profiles have high level of corrosion resistance and long service life.

They are used in suspended ceiling applications to form and align the ceiling frame. After the application, Furring Channels are installed in the Long Angle slots and metal construction is created.

Product Code	Thickness (mm)	a (mm)	b (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
019L032-70	0,70	19	32	Z140 or Z275	min. 210	0,265
025L025-50	0,50	25	25	Z140 or Z275	min. 210	0,185
025L050-70	0,70	25	50	Z140 or Z275	min. 210	0,393



ZED PROFILE

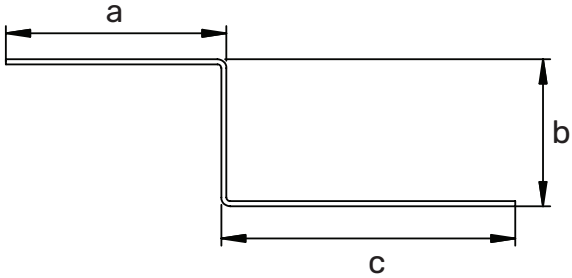

045f070

Product Code	Thickness (mm)	a (mm)	b (mm)	c (mm)	Coating	Yield Strength FY (N/mm ²)	Weight (kg/m)
030Z020-70	0,70	30	20	40	Z140 or Z275	min. 210	0,470









PRODUCT CATALOG



TSE EN 14353
TS EN 14195
TSE K 236



EN ISO 9001
20100183003915
EN ISO 14001
20104183003916



FACTORY 1

1208. Sokak
No: 6-8D-8E
Ostim / ANKARA / TÜRKİYE
T: 0312 354 01 06
F: 0312 354 01 07

FACTORY 2

Alcı OSB Mah.
2032. Cadde No: 9
AS02 Sincan / ANKARA
T: 0312 513 25 61
F: 0312 513 25 62

www.umsmetal.com.tr